


myappliances

USER MANUAL

SPLASHBACK

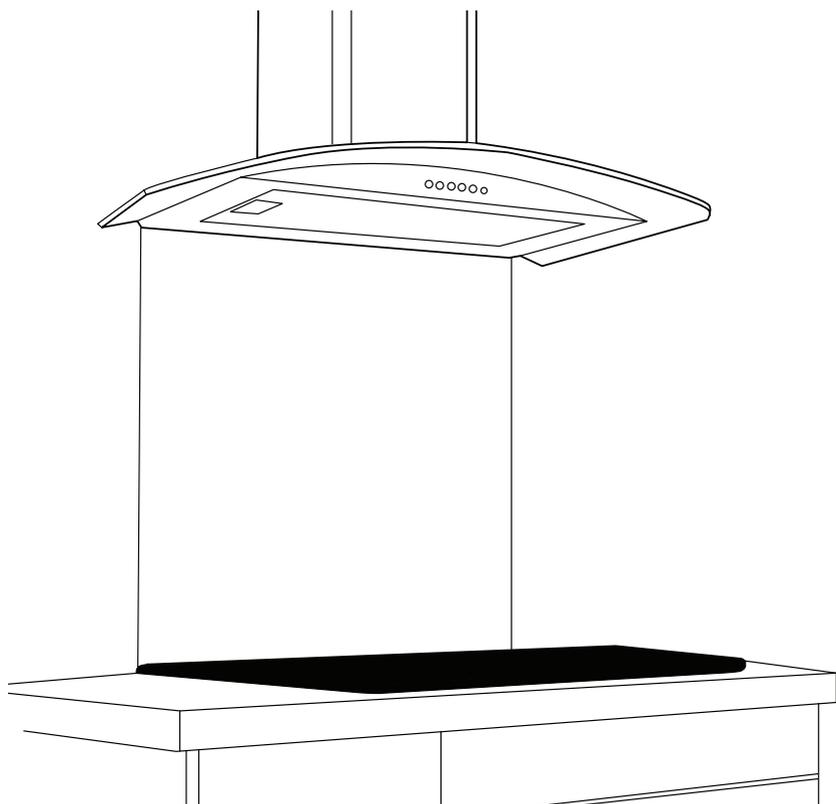

GB IE

Let's get started...



Getting **started**...

Before you start
Safety

04

05

06



In more detail...

Care and maintenance

07

08



Appendix

Installation

09


Getting Started...

Before you start	05
Safety	06

Before you start

- ✓ Check the pack and make sure that you have all parts listed.
- ✓ When you are ready to start, make sure that you have the right tools available, plenty of space and a clean dry and smooth area for installation.
- ✓ After unpacking the appliance please check that it is not damaged. If in doubt, do not use the appliance but contact Customer Services on 0844 800 1128 (UK), 1 800 535542 (Ireland) and 01 56 48 02 60 (France)

You will need



- CAUTION:** Always ensure the product is securely installed before use.
- Self adhesive tape is a fixation support until the silicone sealant has set
- Domestic use only
- If this product contains glass, please take care when fitting or handling to prevent personal injury or damage
- The hob must not be used for 24 hours after the splashback has been installed
- Wait 24 hours before removing the protective film

In more detail...

Care and maintenance 08


Care and maintenance

- Clean Stainless Steel using non-corrosive, liquid detergent or a special stainless steel cleaner and avoid the use of abrasive cleaning products.
- Clean glass with a damp cloth and mild soap. Dry with a soft clean cloth. Never use scourers, abrasives or chemical cleaners.


Appendix...

Installation


01

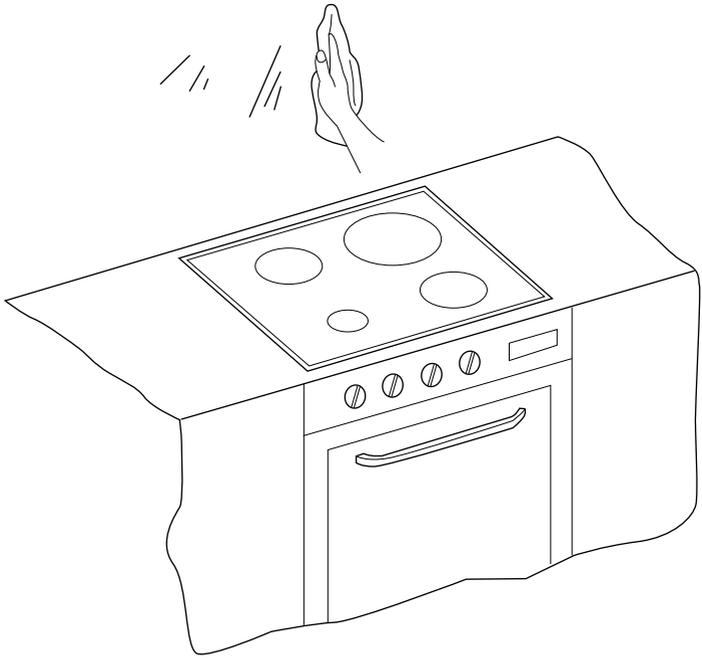

NOTE: Ensure walls are level and clean.

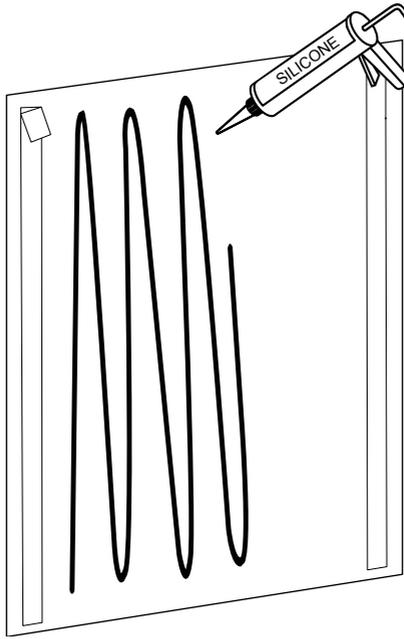


Glass

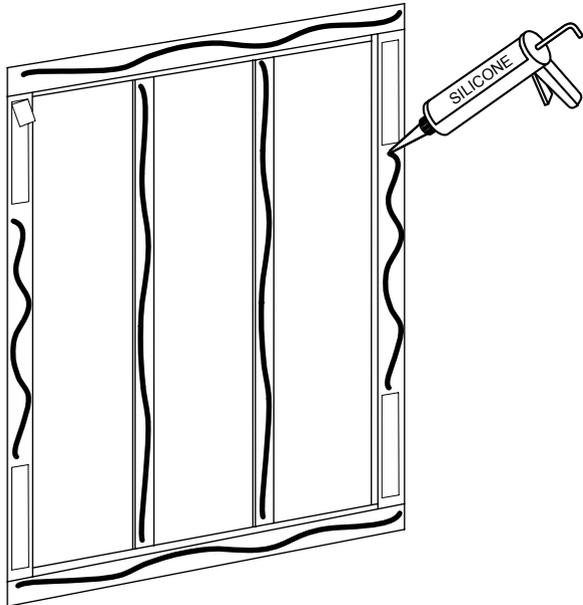

Stainless Steel

NOTE: The double sided tape supports the splash back while the silicone adhesive sets.

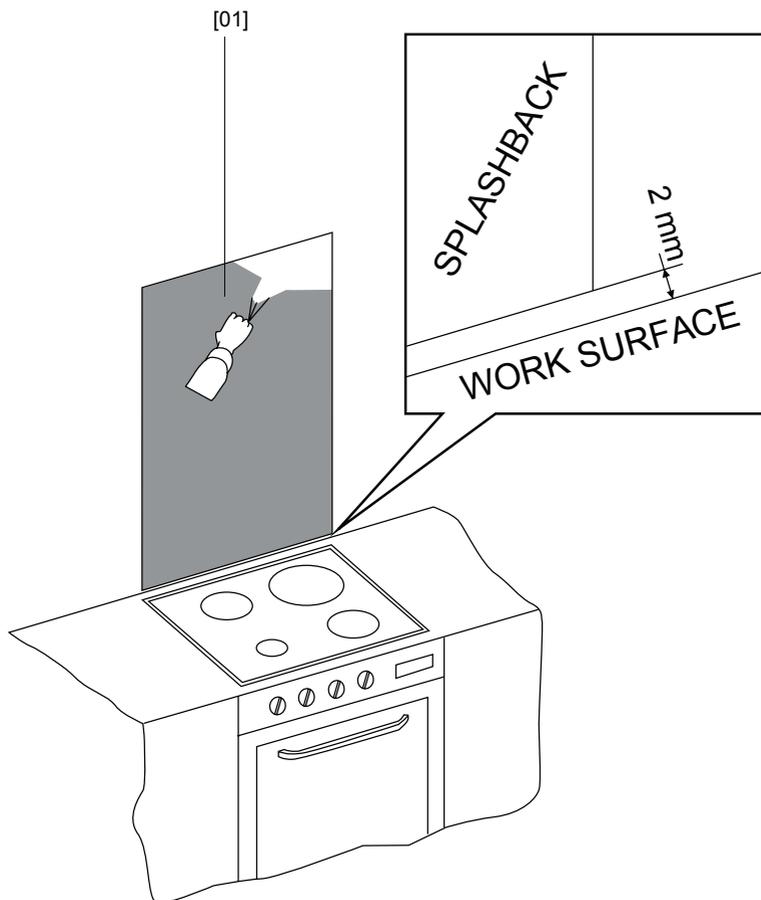

WARNING: Wait 24 hours before removing the protective film (only on s/steel version)



WARNING: The hob must not be used for 24 hours after the splashback has been installed.

Note for Glass splashbacks:

If installing the glass splash back, then a 2mm gap needs to be left all the way around, so it can expand without pressing against anything which will cause internal stresses.

Note for S/Steel splashbacks:

Seal around the Splash Back with silicone sealant.



MYAPPLIANCES

Unit 3 Normandy Landings,

3 Pope Street

NORMANTON

West Yorkshire

WF6 2AG
